


CUSTOMER SATISFACTION..... "Whatever it takes"

STANDARD FEATURES:

- Vertical FIFO/LIFO/Pass through
- Each Buffer Position consists of a Moving Belt Surface to Provide a Smooth Transition in and out of the Buffer
- The Vertical magazine Consist of 9 Levels
- Board Edge Clearance .118"
- Totally Enclosed for Safety with Interlocked Door
- Auto/Manual Switches on Control Panel
- PLC Controls with SMEMA Cables
- 1/2" Steel Base
- Push Button Adjust 2.0" – 16.0"

OPTIONS:

- 18" x 20" PCB Capability
- Warning Light with Alarm
- Cooling Fans
- Light Tower
- High Speed (6 – 10 Seconds)
- 1 Meter Length

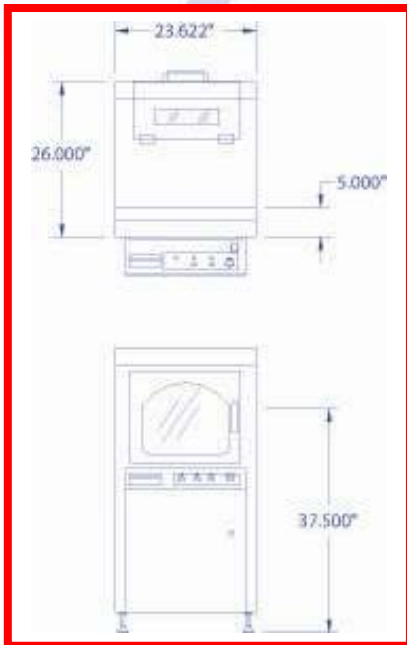

SPECIFICATIONS:

- PCB Size: Min. 2" X 4"
..... Max. 16" X 18"
- PCB Height: 37.5" +/- 2"
- Air Requirements:1 cfm @ 25 PSI
- Power Requirements: ... 15 amps @ 110VAC
- Capacity:..... 9 PCB's
- Weight Capacity:..... 100 lbs.
- Cycle Time:**
- Unload PCB:..... 6 – 16 Seconds
- High Speed:..... 6 – 10 Seconds