


## CUSTOMER SATISFACTION..... "Whatever it takes"

### STANDARD FEATURES:

- Stacks PCBs from Previous Machine
- Mechanical bars lift the PCB from the conveyor and raise it into the stack.
- Open Cover for easy unloading.
- Auto/Manual Switches on Control Panel
- PLC Controls with SMEMA Cables
- Board Edge Clearance = .100" (.060" min)
- Hand Crank width Adjust = 2" – 16"
- PLC Controls with SMEMA Cables
- Steel Welded Frame

### OPTIONS:

- 18" X 20", 21" X 24", 24" X 28" PCB Capability
- Light Tower for Indicating Operator Status
- CE Compliance

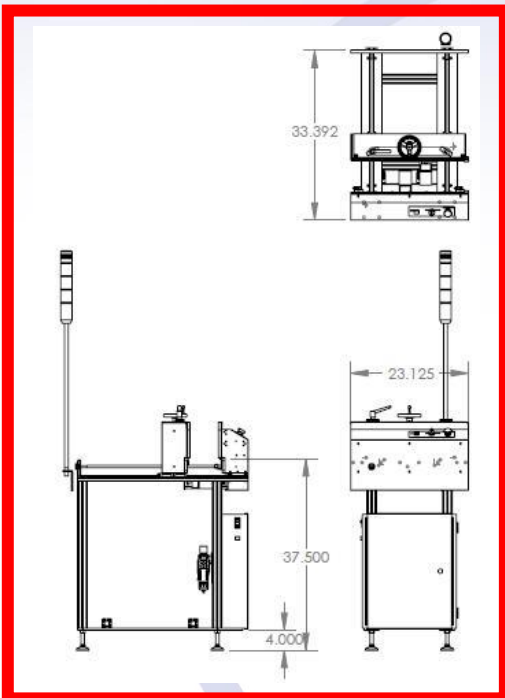

### SPECIFICATIONS:

- PCB Size: ..... Min. 2" X 5"  
..... Max. 14" X 16"  
(Odd Shaped PCB's will not work in this machine)
- PCB Height: ..... 37.5" +/- 2"
- Edge Clearance: ..... 3mm from edge of PCB
- Air Requirements: ..... .5 cfm @ 65 PSI
- Power Requirements: ..... 5 amps @ 110VAC
- Capacity: ..... 8" Stack

#### Cycle Time:

- Unload PCB: ..... 4-6 Seconds

**Conveyor Technologies**

5313 Womack Road

Sanford, NC 27330

Ph: (919)-776-7227

[www.conveyor-technologies.com](http://www.conveyor-technologies.com)

